


GENERAL NOTES:

- A. PARTITION DIMENSIONS ARE GIVEN TO THE FACE OF STUD UNLESS OTHERWISE NOTED.
- B. DOOR AND WINDOW OPENING LOCATIONS ARE DIMENSIONED TO ROUGH OPENING OR CENTERLINE OF OPENING. COORDINATE WITH DOOR SCHEDULE AND WINDOW TYPES, SHEET A6.2.
- C. VERIFY ALL EXISTING CONDITIONS IN THE FIELD.
- D. ALL GYPSUM WALL BOARD TO BE FIRE RESISTIVE TYPE "X". PROVIDE MOISTURE RESISTANT GYPSUM BOARD ON WALL WALLS WITHIN TOILET ROOMS AND JANITOR CLOSETS, BEHIND CERAMIC WALL TILE, AND BEHIND OTHER FINISHES THAT GENERATE MOISTURE, U.O.N.
- E. GYPSUM WALL BOARD SHALL EXTEND FULL HEIGHT OF WALL TO UNDERSIDE OF STRUCTURE ABOVE UNLESS OTHERWISE NOTED. SEE WALL TYPES.
- F. RE: A6.2 FOR DOOR, WINDOW AND FRAME SCHEDULES.
- G. RE: A6.1 FOR FINISH SCHEDULE.
- H. RE: A9.1 AND 9.2 FOR CEILING INFORMATION.
- J. RE: A10.1 & A10.2 FOR FURNITURE AND EQUIPMENT PLAN.
- K. EXTERIOR FINISH INFORMATION IS NOT INDICATED NOR DIMENSIONED ON FLOOR PLAN. REFER TO EXTERIOR ELEVATIONS, SECTIONS, AND DETAILS FOR ADDITIONAL INFORMATION.
- L. THE HINGE SIDE OF ALL DOOR FRAMES SHALL BE MOUNTED 4" [0.102m] FROM ADJACENT PERPENDICULAR WALL U.O.O.
- M. THE DRAWINGS INDICATE LOCATION, DIMENSIONS, REFERENCE, AND TYPICAL DETAILS OF CONSTRUCTION. THE DRAWINGS DO NOT INDICATE EVERY CONDITION - WORK NOT PARTICULARLY DETAILED SHALL BE OF CONSTRUCTION TO PARTS THAT ARE DETAILED. THESE DRAWINGS HAVE BEEN DEVELOPED FROM RECORDS FURNISHED BY THE OWNER AND FIELD SURVEYS, MATERIALS, DIMENSIONS, WALL THICKNESS, ROUGH OPENINGS, PATTERNS, AND THE LIKE ARE INTERPRETATIONS OF THOSE RECORDS AND SHALL BE FIELD VERIFIED BY THE CONTRACTOR. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO COMMENCING WITH THE WORK.
- N. PROTECT ALL EXISTING WORK TO REMAIN FROM DAMAGE DURING CONSTRUCTION. ANY MATERIALS, SYSTEMS, COMPONENTS, FINISHES, AND THE LIKE, DAMAGED DURING CONSTRUCTION SHALL BE REPAIRED OR REPLACED TO OWNER'S ACCEPTANCE AT CONTRACTOR'S EXPENSE.
- P. THE CONTRACTOR SHALL FIELD VERIFY EXISTING PAINT MATERIALS AND FINISHES. APPLY THE APPROPRIATE SEPARATION COAT (PRIMER/BONDING COAT) BETWEEN ALL NON-COMPATIBLE COATINGS (I.E. WHERE NEW WATER-BORNE ACRYLIC IS TO BE INSTALLED OVER EXISTING OIL BASE PAINT).
- Q. ASSURE THAT ALL REQUIRED BACKING IS INSTALLED IN WALLS PRIOR TO INSTALLING DRYWALL. THIS INCLUDES BACKING FOR WALL-MOUNTED DOORSTOPS.
- R. ALL EXPOSED SURFACES OF CABINETS AND CASEWORK ARE TO BE FINISHED WITH DECORATIVE PLASTIC LAMINATE. EXPOSED SURFACES ARE ANYTHING THAT CAN BE SEEN WITH THE DOORS AND DRAWERS CLOSED. THIS INCLUDES THE UNDER SIDE AND TOP OF WALL MOUNTED CABINETS (INCLUDING SCRIBES AND FILLER PANELS), ALL SURFACES OF COUNTER SUPPORTS, AND ALL OPEN CABINET SHELVES AND SURFACES. IN ADDITION, ALL SIX SURFACES OF ALL CABINET DOORS AND ALL SIX SURFACES OF OPEN ADJUSTABLE SHELVES ARE TO BE FINISHED IN DECORATIVE PLASTIC LAMINATE. THE FRONT AND FOUR EDGES OF ALL DRAWER FRONTS ARE TO RECEIVE DECORATIVE PLASTIC LAMINATE. THE SEMI-EXPOSED INTERIOR SURFACES OF DRAWERS AND CABINETS (THOSE SURFACES THAT CAN ONLY BE SEEN WHEN THE DRAWER OR DOOR IS OPEN) ARE TO BE MELAMINE WITH VINYL EDGES, EXCEPT AS NOTED OTHERWISE ABOVE. THE FOUR EDGES OF ALL MELAMINE ADJUSTABLE SHELVES WITHIN CLOSED CABINETS ARE TO BE FINISHED WITH VINYL EDGING. THE UNDERSIDES OF ALL COUNTER TOPS ARE TO RECEIVE LAMINATE BACKING SHEET.
- S. ALL FILE DRAWERS MUST HAVE A MINIMUM CLEAR INSIDE HEIGHT OF 10-1/2" AND A MINIMUM CLEAR INSIDE WIDTH OF 13", U.O.N.




1 SECOND FLOOR PLAN BLDG. 33

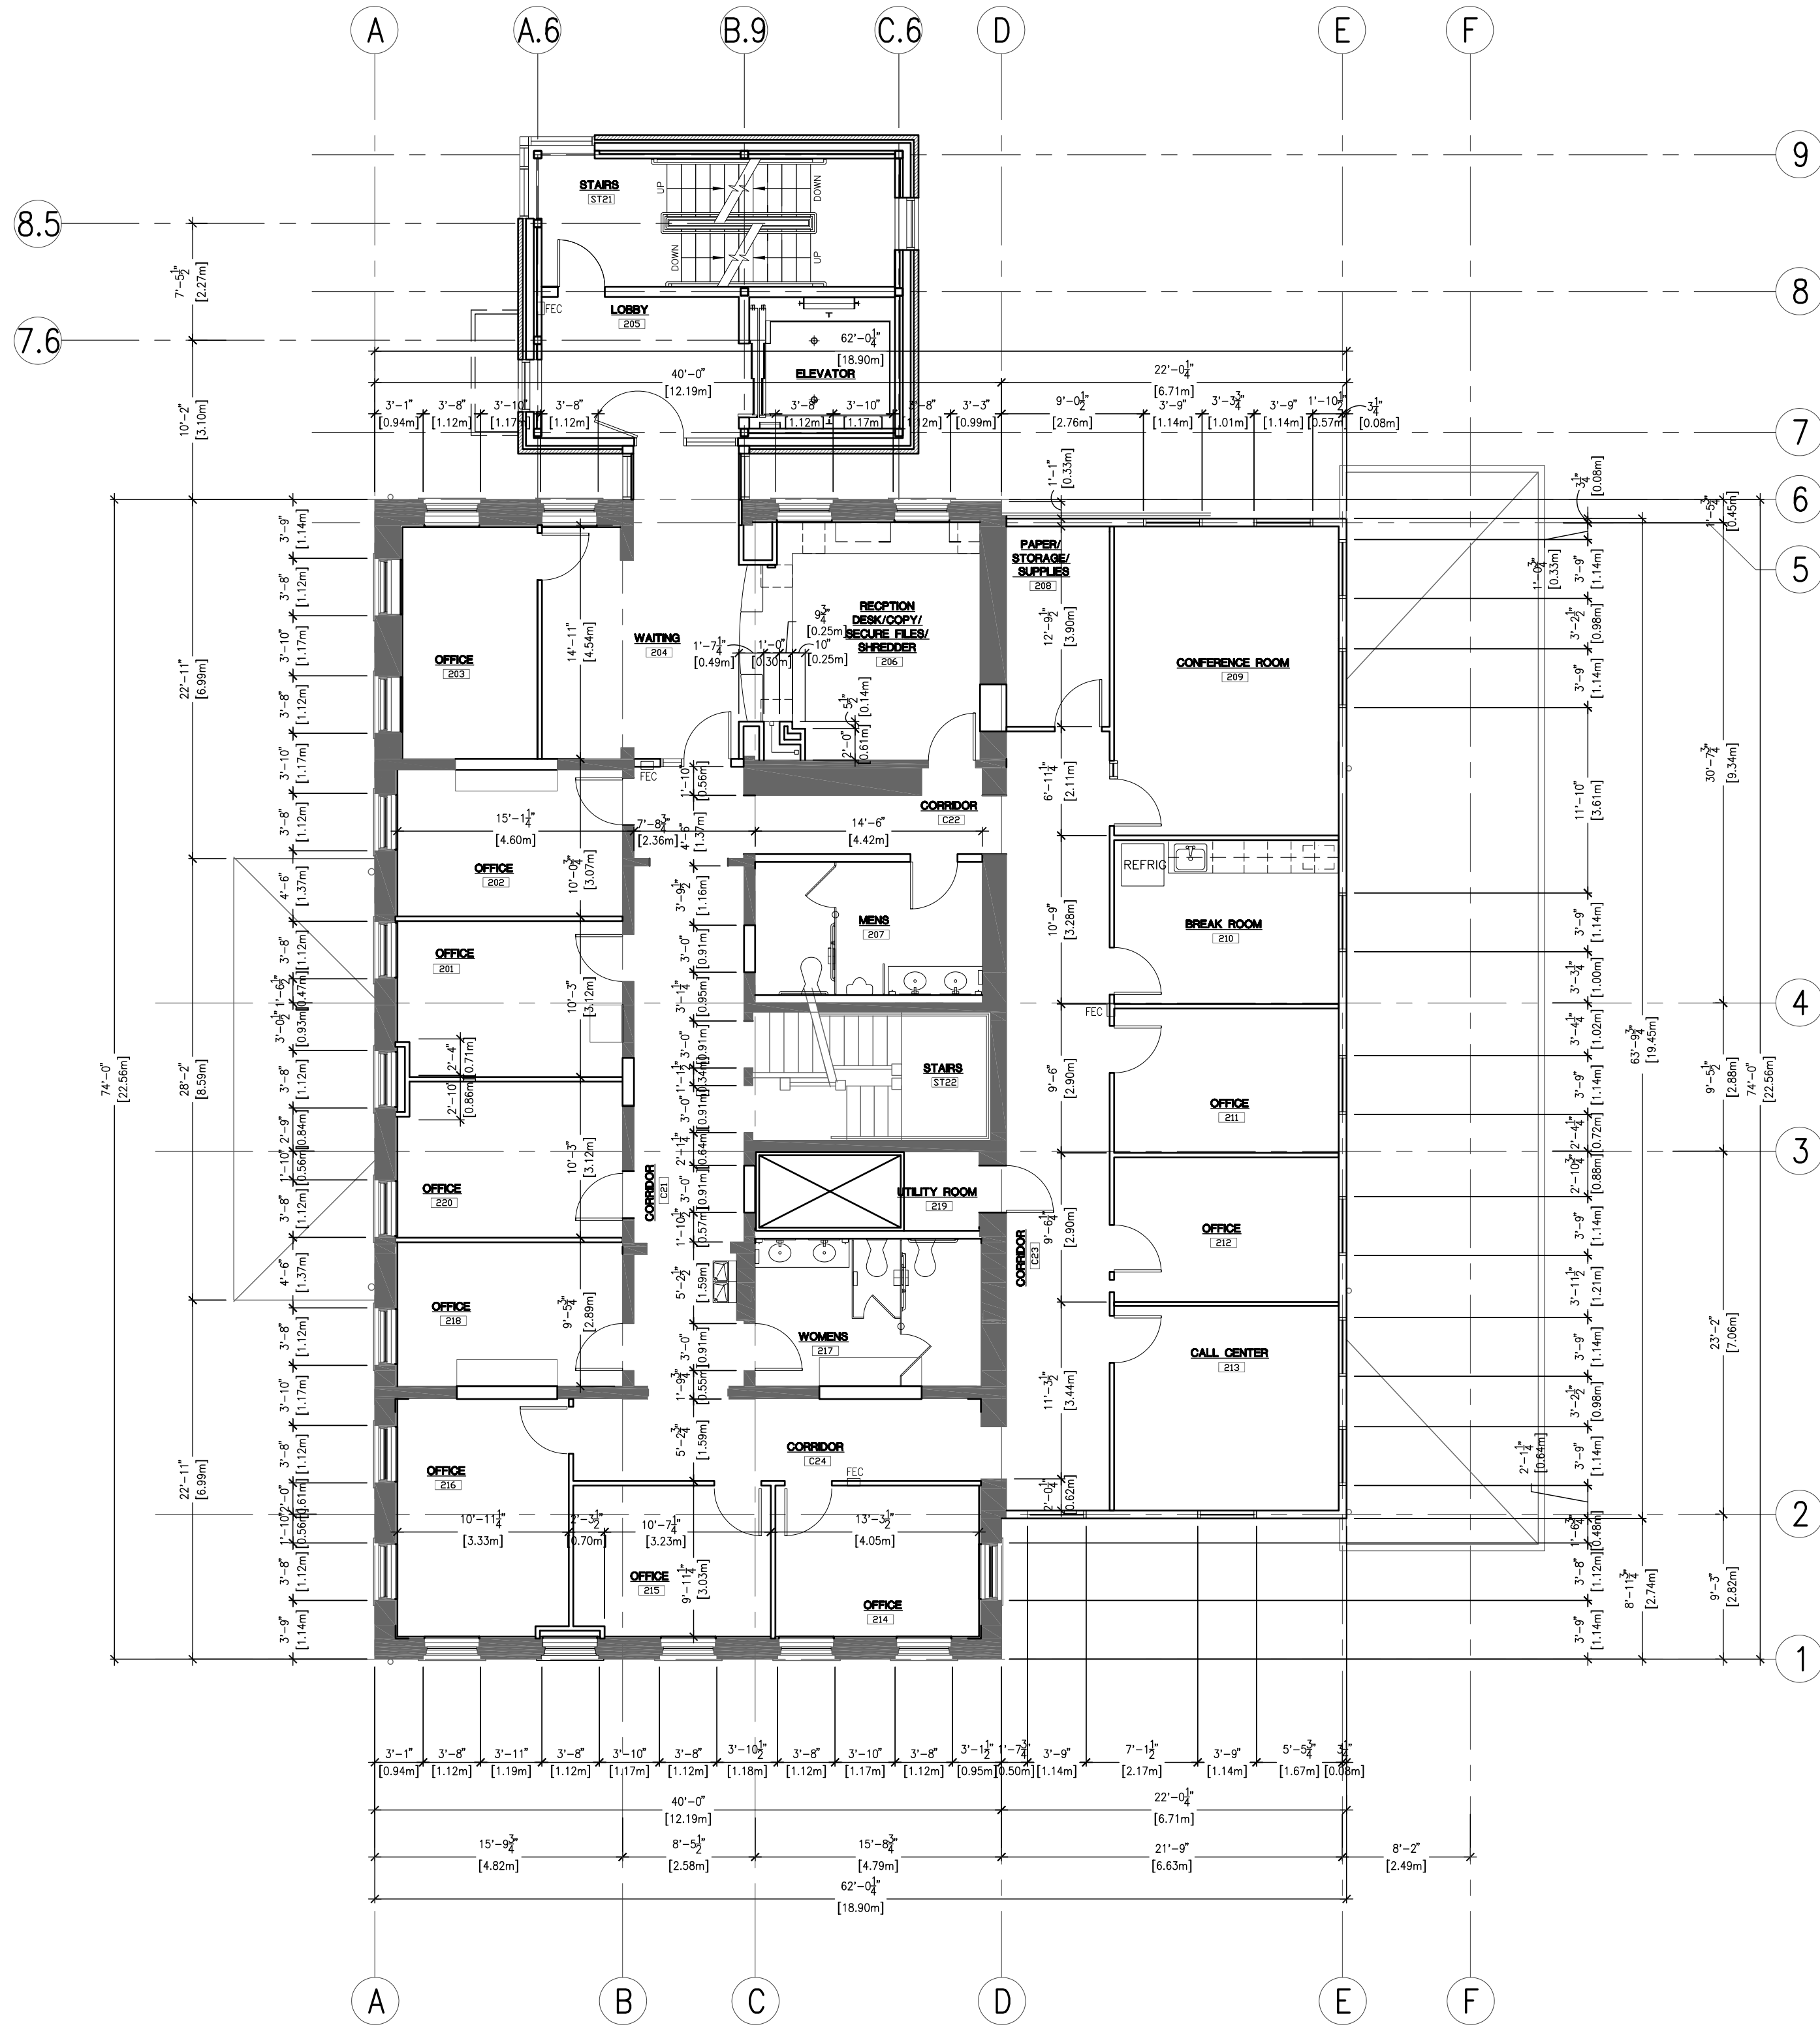

SCALE: 1/8" = 1'-0"

2 THIRD FLOOR PLAN BLDG. 33



SCALE: 1/8" = 1'-0"

LEGEND:

- FIRE EXTINGUISHER CABINET, RE: A7.2-14 AND 15.
- CORNER GUARD
- NEW CONSTRUCTION
- EXISTING CONSTRUCTION

95% SUBMISSION

REVISIONS

DATE

CSHQ

C.W. MOORE PLAZA
250 S. 5TH ST. • BOISE, ID 83702
(208) 343-4635 • FAX (208) 343-1858
http://www.cshqa.com

JOHN D. MAULIN, ARCHITECT

C.W. MOORE PLAZA
250 S. 5TH ST.
BOISE, IDAHO
PHONE: (208) 343-4635 FAX: (208) 343-1858

THESE DRAWINGS AND SPECIFICATIONS, AS INSTRUMENTS OF SERVICE, ARE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT. ENGINEER WHETHER THE PROJECT FOR WHICH THEY ARE MADE IS EXECUTED OR NOT. THESE DRAWINGS AND SPECIFICATIONS SHALL NOT BE USED BY ANY PERSON OR ENTITY ON OTHER PROJECTS FOR ANY ADDITION TO THE PROJECT, OR COMPLETION OF THE PROJECT, WHEN PHASED WITHOUT THE WRITTEN CONSENT OF CSHQA OR ITS AFFILIATES. Copyright © 2011

STAMP

PRELIMINARY
NOT FOR
CONSTRUCTION

DRAWING TITLE

DIMENSIONED FLOOR PLANS

APPROVED: DIVISION CHIEF

APPROVED: SERVICE DIRECTOR

PROJECT TITLE

VAMC
RENOVATE
BUILDING 33

BUILDING NUMBER

33

LOCATION

BOISE, IDAHO

CHECKED

JMO

DRAWN

BKS

DATE

03/04/11

PROJECT NO.

531-10-114

DRAWING NO.

A1.4

DWG. 18 OF 102

DEPARTMENT OF VETERANS AFFAIRS